









ENERGY CLASS



BASIC INFORMATION ABOUT THE PRODUCT



- Convenient cleaning of the cooker thanks to the traditional ash drawer.
- Easy firing is guaranteed by the cast iron grate with independent aeration.
- Innovative smoke retarder during fuel loading.
- The exceptional durability of the cooker is achieved through the design using multi-plane bending of the steel from the largest possible pieces.
- The small size of the cooker and the low value of the lower heating power range make the cooker ideal for smaller rooms.
- It is possible to connect the flue pipe from the top or the back of the cooker with a solid cast iron flue.
- If the flue outlet is connected to the rear, it is possible to use the upper heating plate.
- The cooker is equipped with an adjustable air guide to keep the glass clean made of heat-resistant ceramic glass used in all Hitze fireplaces (up to 800 degrees C).
- The use of two deflectors (ceramic and steel) ensures ecological combustion.


Nominal power [kW]	5,5
Heating load range [kW]	2,5-7
Thermal efficiency [%]	78
CO emissions (at 13% O2) [g/m3]	0,035
Pollen emission [g/m3]	1,137
Average fuel consumption [kg/h]	1,7
Glass dimensions [mm]	207x316
Flue diameter [mm]	150
Weight [kg]	84
Efficiency factor	104,1





PRODUCER OF FIREPLACES



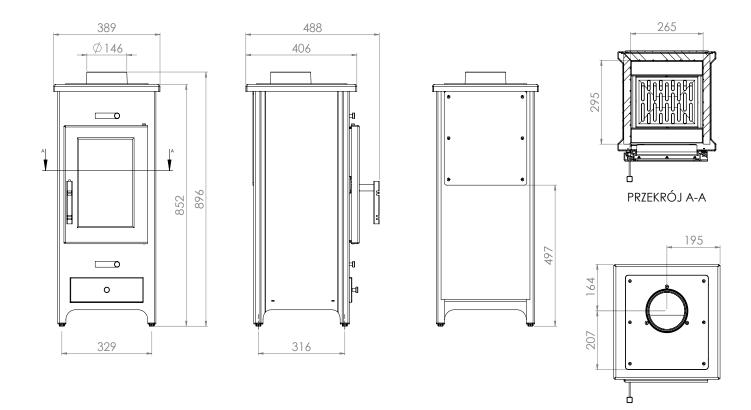

LEGNO