

## BASIC PRODUCT INFORMATION




- Cast iron flue, grate and decor glass as standard.
- Combustion chamber lined with acubet.
- Two flue mounting options - from the top or from the back (when positioned at the back, the main opening is plugged with the heating plate).
- Housing sides available in different colours.
- Possibility of connecting a DGP.
- Independent regulation of primary and secondary air supply, using two levers.
- Modular base - four mounting options (on legs or with a recess for wood).
- Fuel: seasoned hardwood (beech, birch, hornbeam) with moisture content < 20%.

Nominal power [kW]	6,5
Heating load range [kW]	3-8,5
Thermal efficiency [%]	83
CO emission (at 13% O <sub>2</sub> ) [g/m <sup>3</sup> ]	0,038
Dust emission [g/m <sup>3</sup> ]	1,080
Average fuel consumption [kg/h]	1,9
Glass dimensions [mm]	390x540
Flue diameter [mm]	150
Inlet diameter [mm]	100
Weight [kg]	112
Efficiency coefficient	111,4



# LUPOS

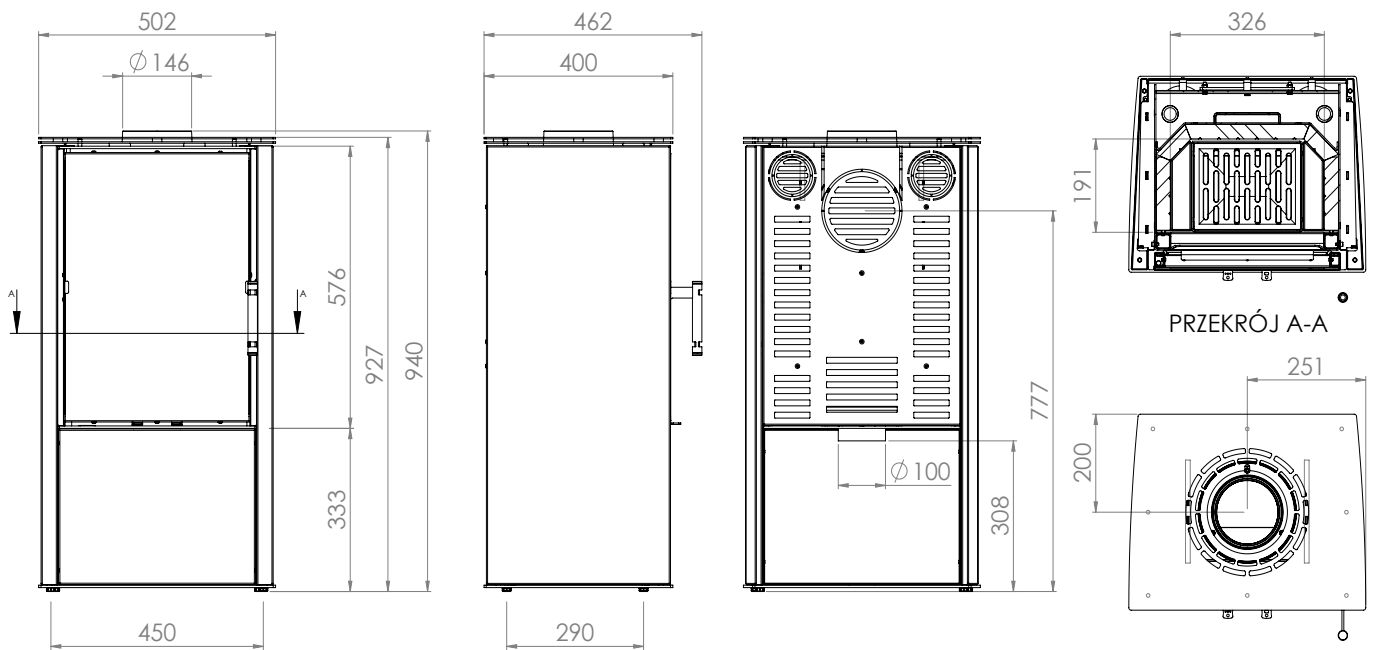

# LUPOS