

BASIC INFORMATION ABOUT THE PRODUCT




- Convenient cleaning of the cooker by means of the ash pan located under the grate.
- Easy firing is guaranteed by the cast-iron grate with independent aeration.
- The cooker's exceptional longevity is achieved through a design that makes use of multi-plane bending of the steel from the largest possible pieces.
- The small size of the cooker and the low value of the lower heating power range make the cooker ideal for smaller rooms.
- There is a possibility of connecting the flue from the top or the back of the cooker with a solid cast iron flue.
- If the flue outlet is connected at the rear, it is possible to use the upper heating plate.
- The cooker is made of high quality P265GH boiler steel.
- The cooker is equipped with an air guide to keep the glass clean made of heat-resistant ceramic glass used in all Hitze fireplaces (up to 800 degrees C).
- The use of two deflectors (ceramic and steel) ensures ecological combustion..

Nominal power [kW]	6,5
Heating load range [kW]	3-8,5
Thermal efficiency [%]	84
CO emissions (at 13% O ₂) [mg/Nm ³]	948
Pollen emission [mg/Nm ³]	26
Average fuel consumption [kg/h]	1,86
Glass dimensions [mm]	445x532x292
Flue diameter [mm]	150
Inlet diameter [mm]	123
Weight [kg]	163
Efficiency factor	111,8



SIGA 3S

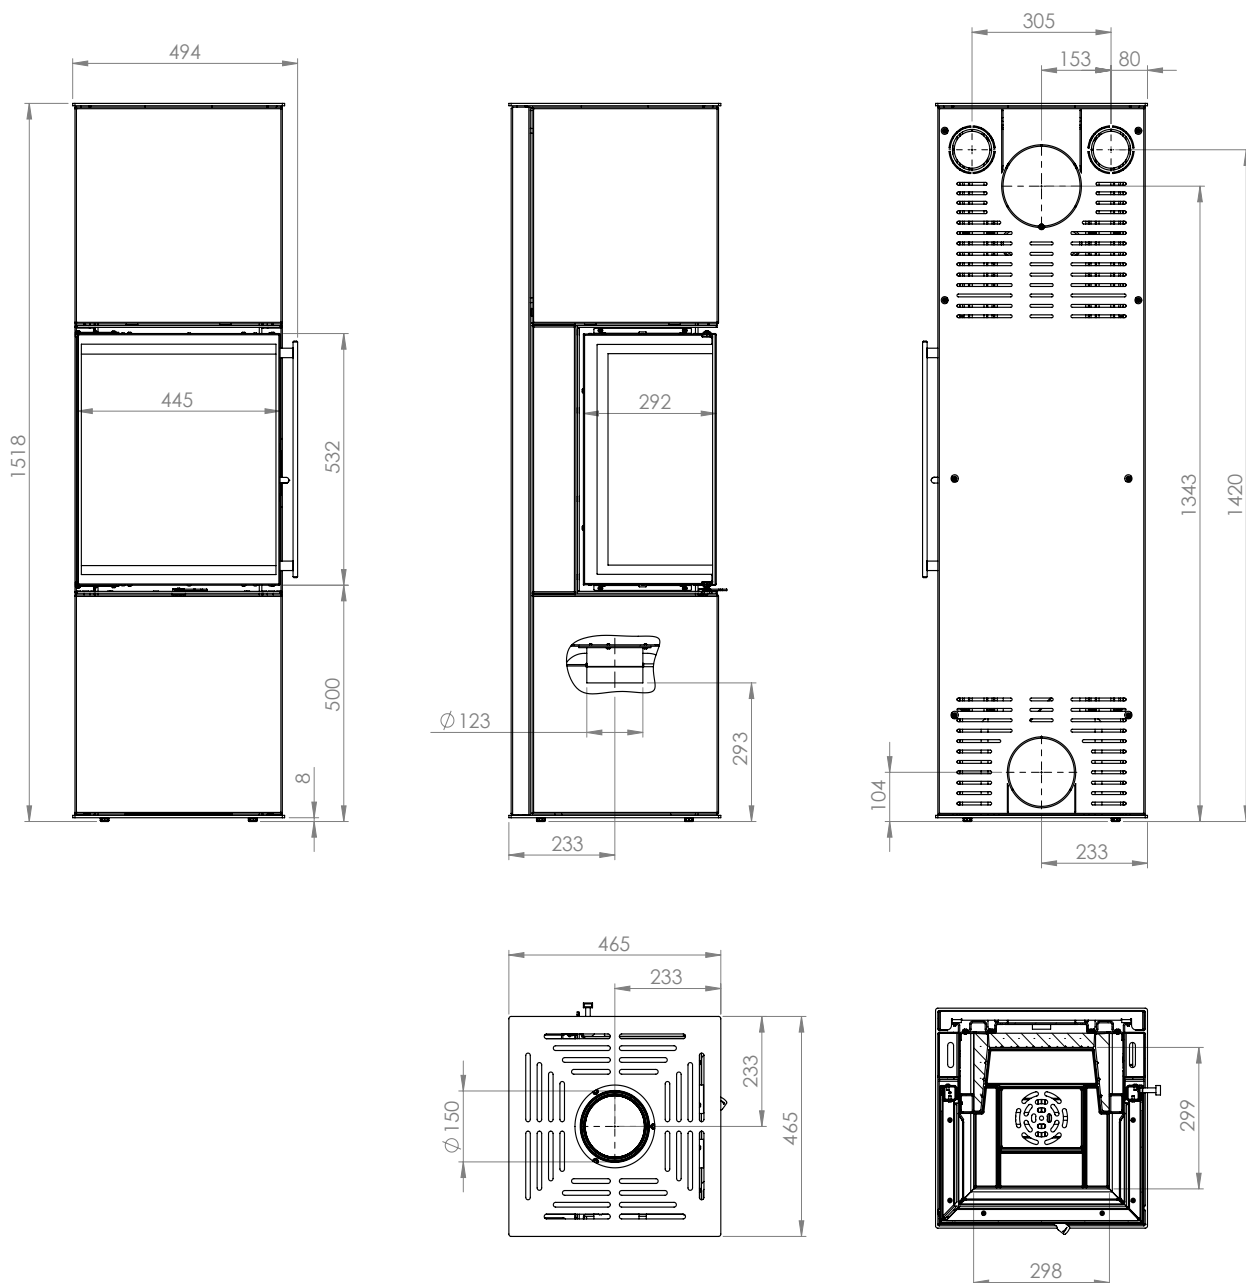

SIGA 3S